

## RENO SEVEN DEPARTURE


RENO/TAHOE INTL (RNO)  
RENO, NEVADA

## TAKEOFF MINIMUMS

- Rwy 7: NA- Obstacles.
- Rwy 16L: Standard with minimum climb of 730' per NM to 10900, or 600-1½ with minimum climb of 352' per NM to 10900.
- Rwy 16R: Standard with minimum climb of 460' per NM to 10900, or 300-1 with minimum climb of 395' per NM to 10900.
- Rwy 25: Standard with minimum climb of 500' per NM to 9700.
- Rwys 34L/R: Standard with minimum climb of 480' per NM to 8700, or 500-1½ with minimum climb of 430' per NM to 8700.

ATIS	
135.8	363.0
CLNC DEL	
124.9	370.85
GND CON	
121.9	348.6
RENO TOWER	
118.7	257.8

NOTE: RADAR required.

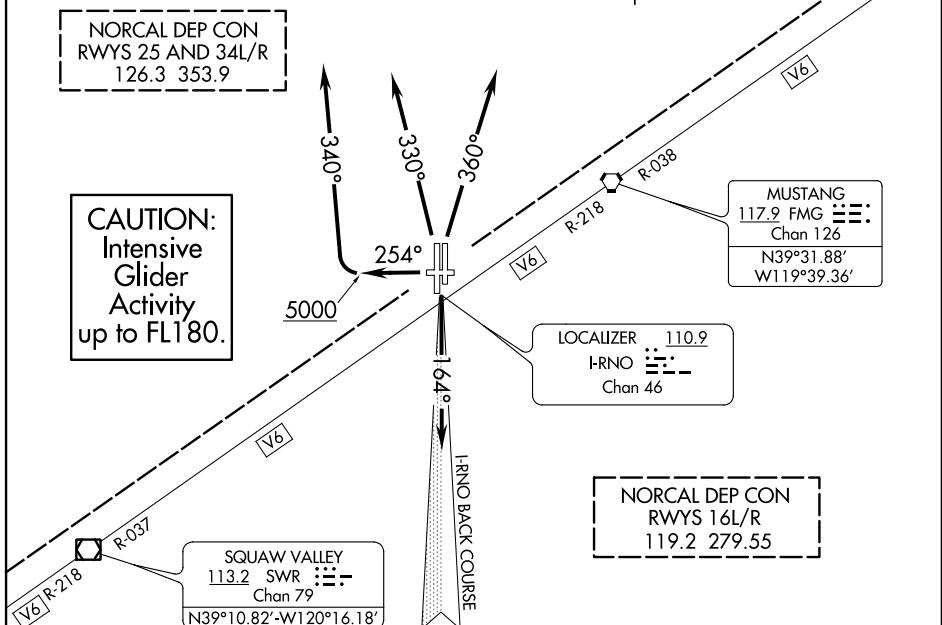

## TAKEOFF OBSTACLE NOTES

- Rwy 16L: Multiple poles, trees, bushes, terrain and buildings with antennas and cameras beginning 618' from DER, 131' left of centerline, up to 20' AGL/4959' MSL.
- Rwy 16R: Multiple trees beginning 2784' from DER, 171' right of centerline, 20' AGL/4510' MSL.  
Multiple trees and terrain beginning 746' from DER, 380' left of centerline, up to 20' AGL/4723' MSL.
- Rwy 25: Multiple trees, poles, fence, and vent on building beginning 222' from DER, 201' right of centerline, up to 103' AGL/4608' MSL.  
Multiple trees, poles and sign beginning 500' from DER, 31' left of centerline, up to 20' AGL/4506' MSL.
- Rwy 34L: Multiple trees and pole beginning 1229' from DER, 180' right of centerline, up to 20' AGL/4498' MSL.  
Multiple trees beginning 1193' from DER, 331' left of centerline, up to 20' AGL/4489' MSL.
- Rwy 34R: Multiple trees and poles beginning 1067' from DER, 172' right of centerline, up to 20' AGL/4497' MSL.  
Multiple trees beginning 1230' from DER, 350' left of centerline, up to 20' AGL/4498' MSL.  
Building 1.2 NM from DER, 1730' right of centerline, 363' AGL/4780' MSL.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

RENO SEVEN DEPARTURE  
(RENO7.FMG) 14037RENO, NEVADA  
RENO/TAHOE INTL (RNO)